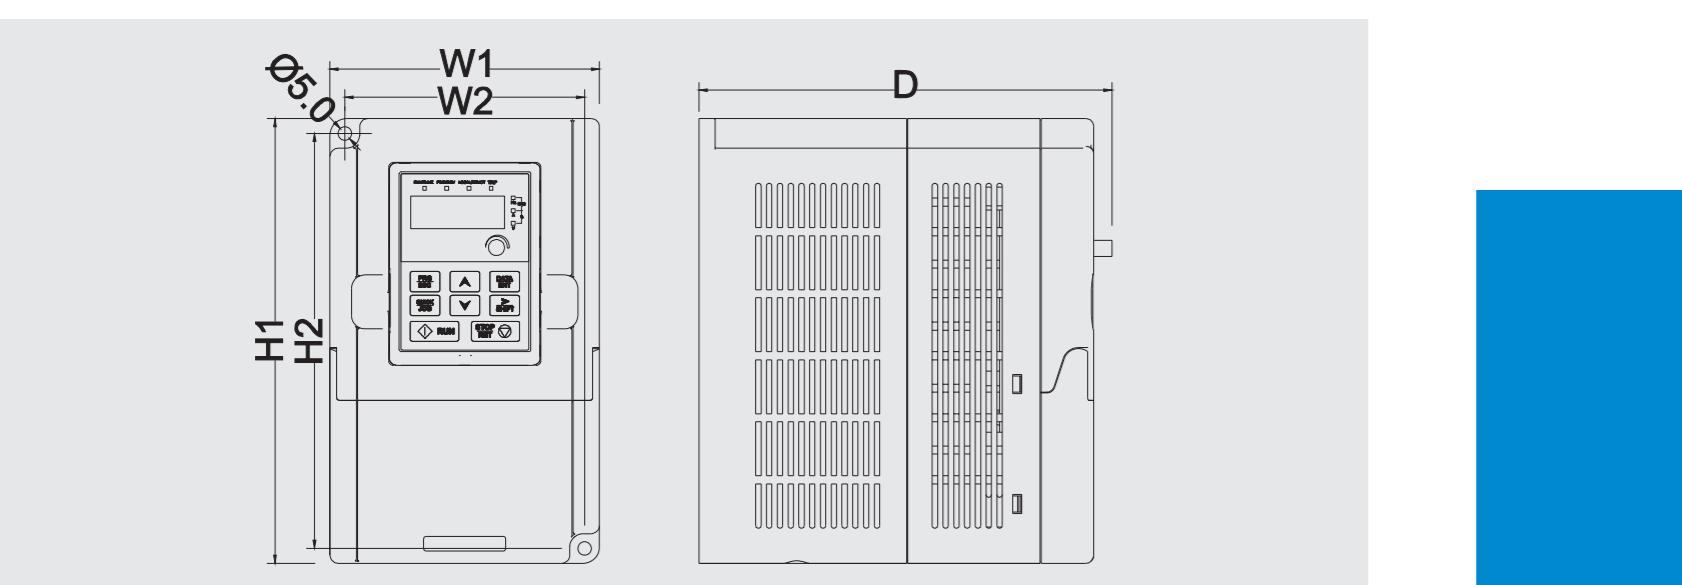
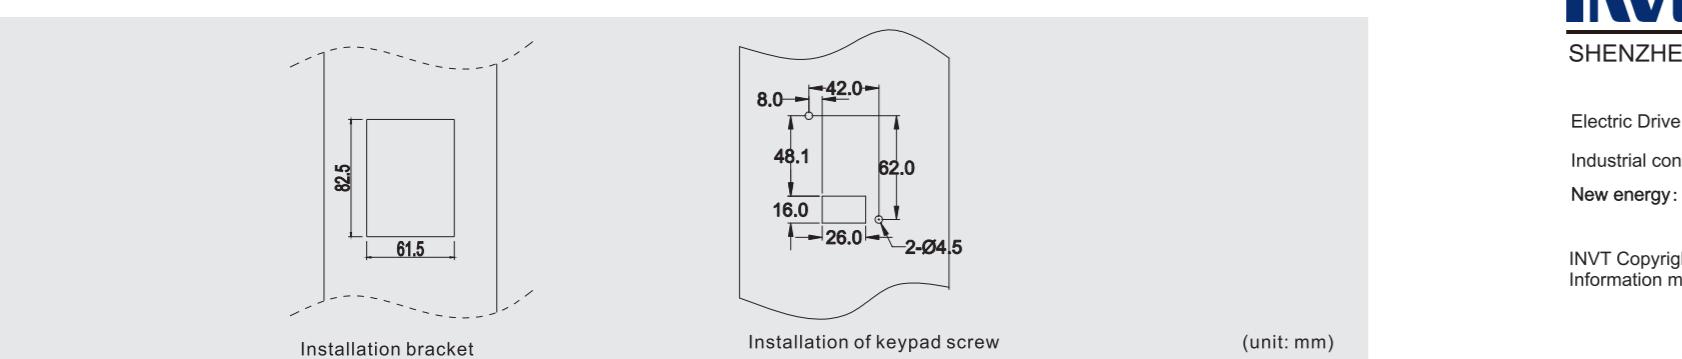


**Installation dimension****1. Inverter dimensions**


Model	W1 (mm)	W2 (mm)	H1 (mm)	H2 (mm)	D (mm)
Single-phase 230V	GD10-0R2G-S2-B	85	74	140	131.5
	GD10-0R4G-S2-B				134.2
	GD10-0R7G-S2-B	85	74	140	131.5
	GD10-1R5G-S2-B	100	89	165	154
	GD10-2R2G-S2-B				153.2
Three-phase 230V	GD10-0R2G-2-B	85	74	140	131.5
	GD10-0R4G-2-B				134.2
	GD10-0R7G-2-B	85	74	140	131.5
	GD10-1R5G-2-B	100	89	165	154
	GD10-2R2G-2-B				153.2
Three-phase 400V	GD10-0R7G-4-B	100	89	165	154
					153.2

**2. External keypad installation****Brief introduction of Goodrive10 inverters**

Gooddrive10 Series mini-economy inverters are designed for the small-power OEM application market. With The function of vectorization V/f control and PID function, multi-step speed, DC braking and Modbus communication and so on, the inverter has more advantages but occupied less installation space.


**Goodrive10 inverters**

Innovation, Value, Teamwork

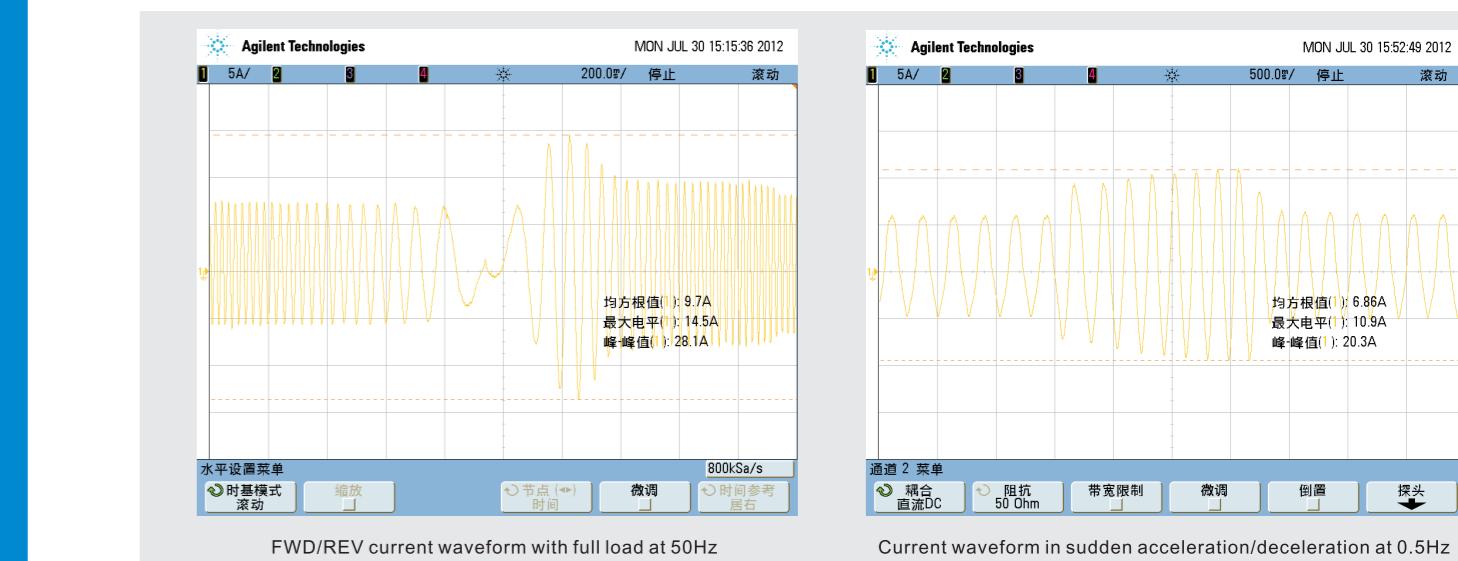**Advantages****1. V/f control****2. Natural cooling(for the applications with cotton and dust)**

Remarks:  
 1. Natural cooling: single phase or three phase 230V 0.2-0.75kW.  
 2. Air forced cooling: single phase or three phase 230V 1.5-2.2kW, three phase 380V 0.75-2.2kW.



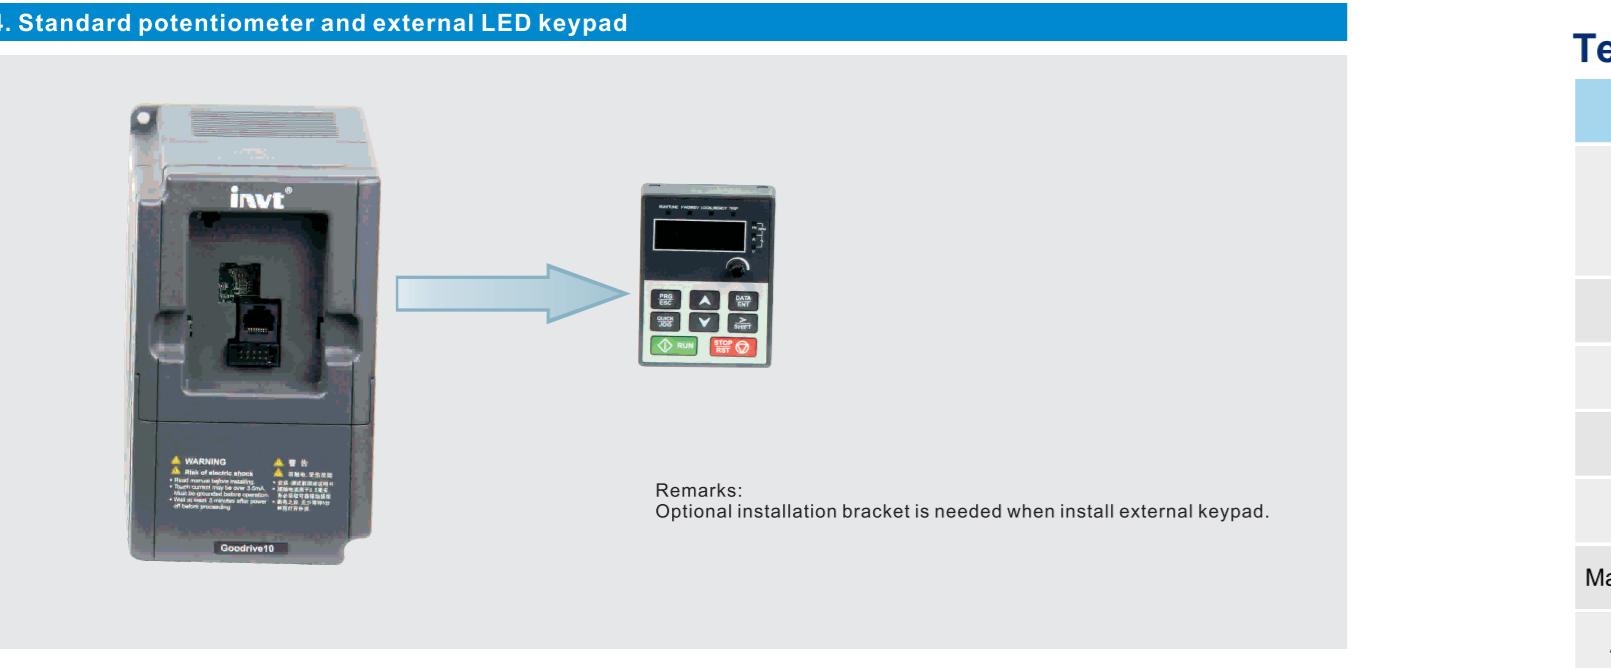

- 6. Various function setting**
- (1) Standard Modbus communication
  - (2) Built-in PID
  - (3) 16 steps multi-step speed control
  - (4) Flexible V/f curve setting
  - (5) Multi-function I/O terminal (the delay time can be set)
  - (6) Fault protection at overcurrent, overvoltage, undervoltage, overtemperature and overload with detailed fault information
  - (7) DC braking, flux braking and resistor dynamic braking
  - (8) Overcurrent and overvoltage stall, stronger load adaptability

## Technical specifications


Function	Specification
Input voltage (V)	230V; input voltage range: single phase or three phase 230V 10% 400V; input voltage range: three phase 400V 15%
Input frequency (Hz)	50Hz or 60Hz Allowed range: 47~63Hz
Output voltage (V)	Equal to input voltage with the deviation of less than 5%
Output frequency (Hz)	50Hz/60Hz, Fluctuation range: 5%
Control mode	V/f control
Maximum output frequency	200Hz
Adjustable-speed ratio	0.11111111
Overload capability	150% of rated current: 1 minute
Analog input resolution	≤20mV
Digital input resolution	≤2ms
Analog input/output	Input 1~10V or 0~20mA, output: 1~10V or 0~20mA
Digital input/output	5 Channels digital input, 1 Y terminal output and 1 programmable relay output
Communication	MODBUS
Mountable mode	Wall mounting
Temperature of the running environment	-10~50°C, derate above 40°C
Cooling	Single/three-phase 230V 0.2~0.75kW natural cooling Single/three-phase 230V 1.5~2.2kW, three-phase 400V 0.75~2.2kW
Fault protections	Overcurrent, overvoltage, undervoltage, overtemperature, overload and other protections
Braking unit	Only standard for GD10-B

## Applications:


Packaging machinery, food machinery, textile machinery, centrifuge, engraving machine, and cutting machine, etc.

## Standard wiring

### Wiring diagram of main circuit

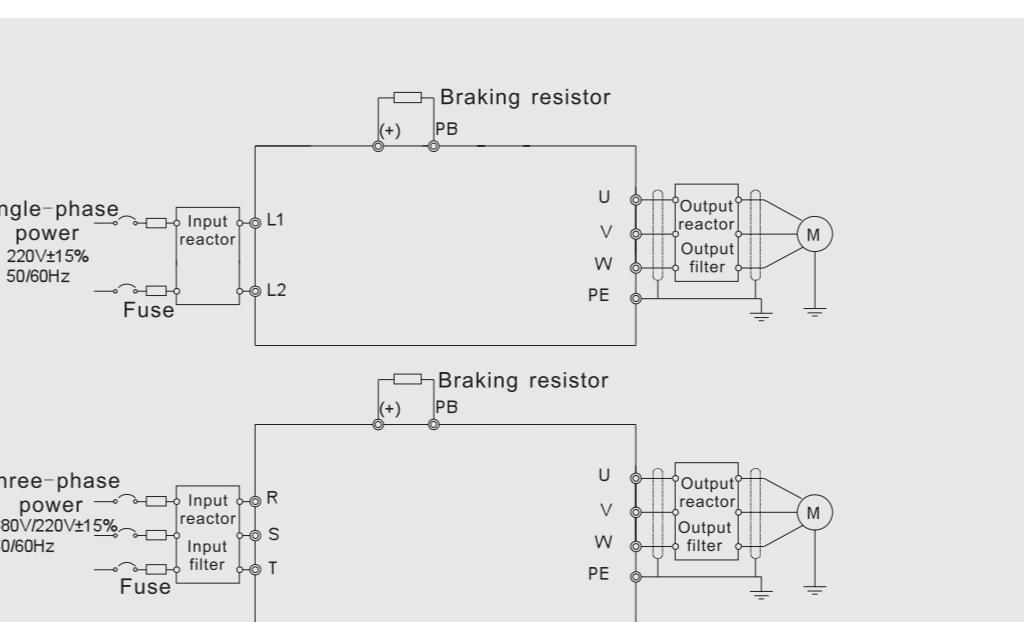

### Wiring diagram of control circuit

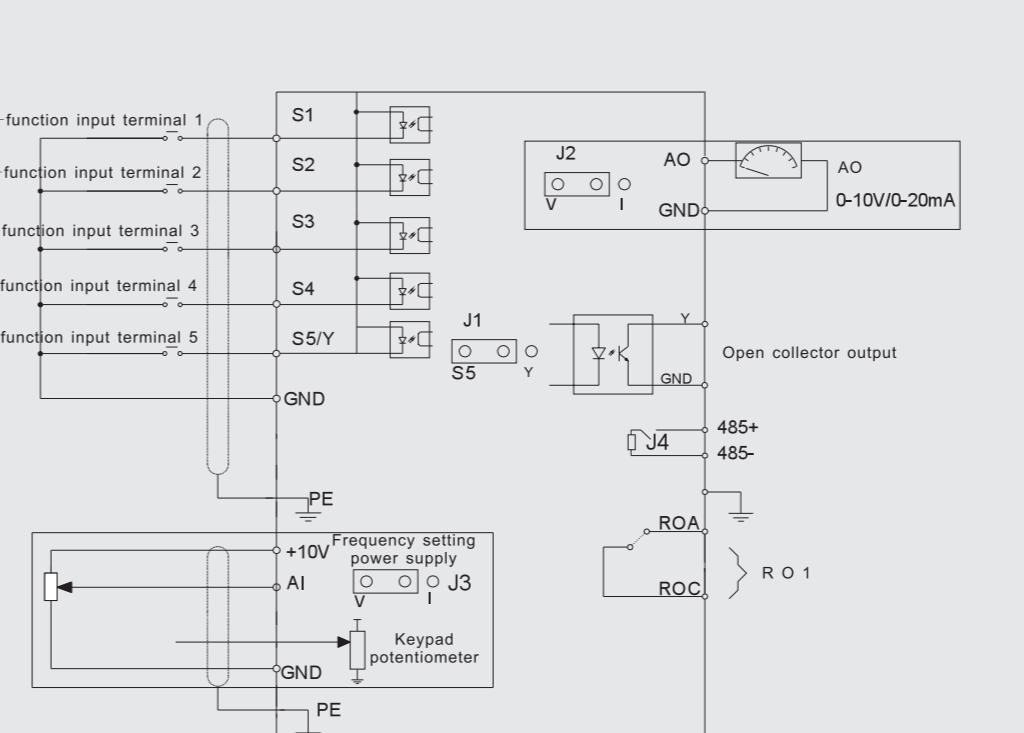

## Standard wiring

### Wiring diagram of main circuit

**GD10 - 2R2G - 4 - B**

① ② ③ ④

Field identification	Sign	Detailed description of the sign	Detailed content
Abbreviation	①	Product abbreviation	Gooddrive10 is shorted for GD10
Rated power	②	Power range + Load type	2R2-2.2kW GC constant torque load
Voltage degree	③	Voltage degree	4:three-phase 400V 2:three-phase 230V S2:single-phase 230V
Lot No.	④	Lot No.	Default: No braking unit B: Built-in braking unit

### Rated specifications

Model	Output power(kW)	Input current(A)	Output current (A)
Single-phase 230V			
GD10-0R4G-S2-B	0.2	4.9	1.6
GD10-0R4G-S2-B	0.4	6.5	2.5
GD10-0R7G-S2-B	0.75	9.3	4.2
GD10-1R5G-S2-B	1.5	15.7	7.5
GD10-2R2G-S2-B	2.2	24	11
GD10-0R2G-2-B	0.2	1.9	1.6
GD10-0R4G-2-B	0.4	2.7	2.5
Three-phase 230V			
GD10-0R7G-2-B	0.75	4.9	4.2
GD10-1R5G-2-B	1.5	9	7.5
GD10-2R2G-2-B	2.2	15	11
GD-phase 400V			
GD10-1R5G-4-B	1.5	4.3	4.2
GD10-2R2G-4-B	2.2	7.1	5.5