


NB1 Miniature Circuit Breaker



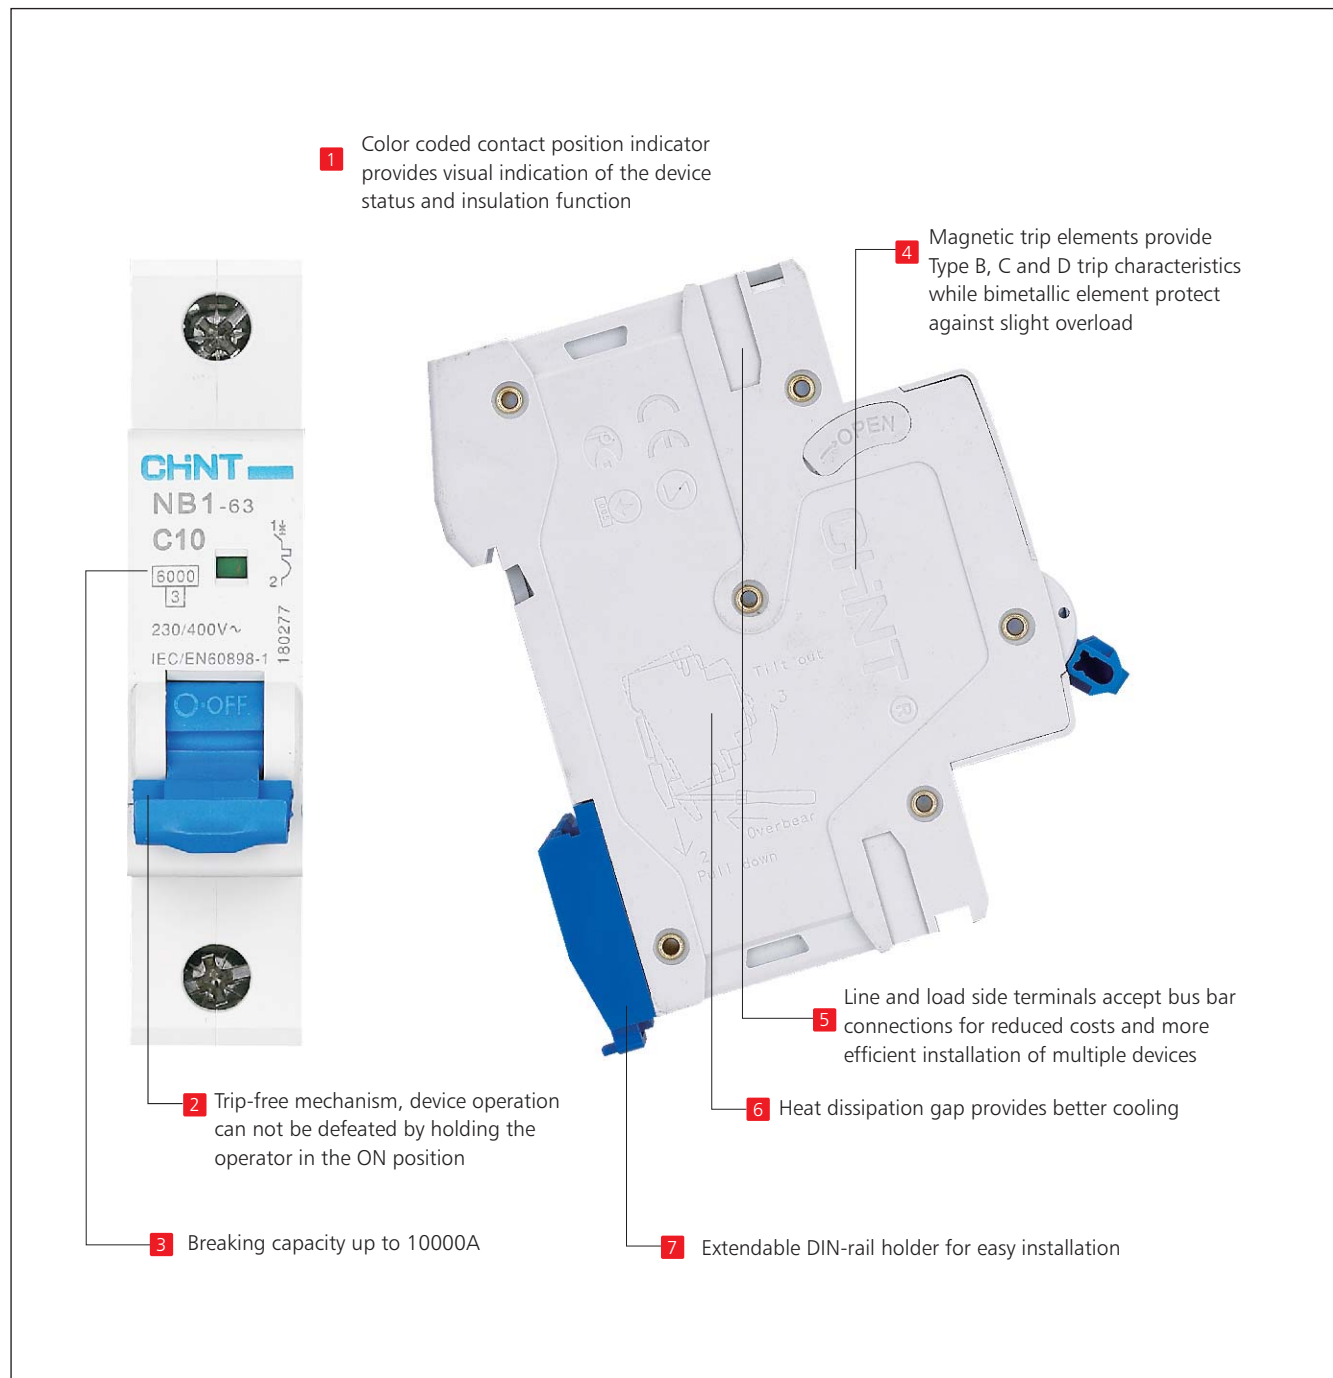

NB1 Miniature Circuit Breaker

1. General

1.1 Function

protection of circuits against short-circuit currents,
protection of circuits against overload currents,
switch,
isolation,
NB1 circuit-breakers are used in domestic installation,
as well as in commercial and industry electrical
distribution systems.

1.2 Selection

Technical data of the network at the point considered:
the earthing systems (TNS, TNC),
short-circuit current at the circuit-breaker installation point,
which must always be less than the breaking capacity of
this device,
Network normal voltage.
Tripping curves:
B curve (3-5In)
protection for people and big length cables in TN and IT
systems.
C curve (5-10In)
protection for resistive and inductive loads with low inrush
current.
D curve(10-14In)
protection for circuits which supply loads with high inrush
current at the circuit closing
(LV/LV transformers, breakdown lamps).

1.3 Approvals and certificates

Detailed information, please refer to Certificates Table
on the last page.



RCC











UL US



2. Technical data

2.1 Curves

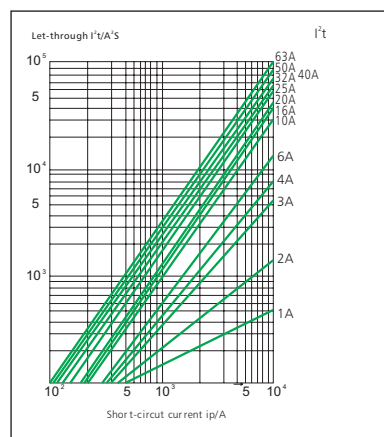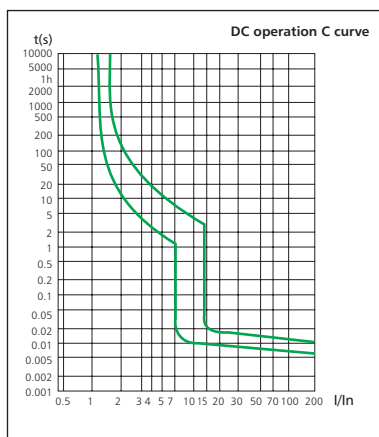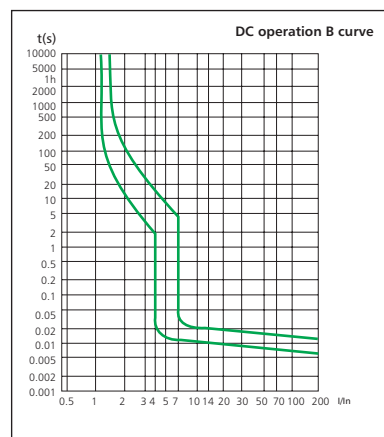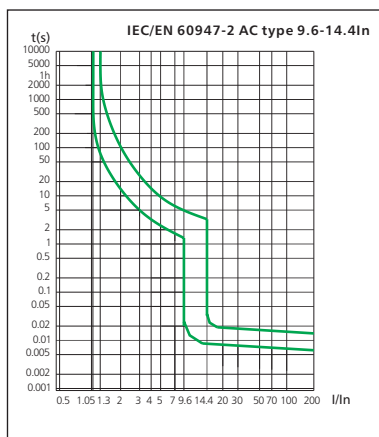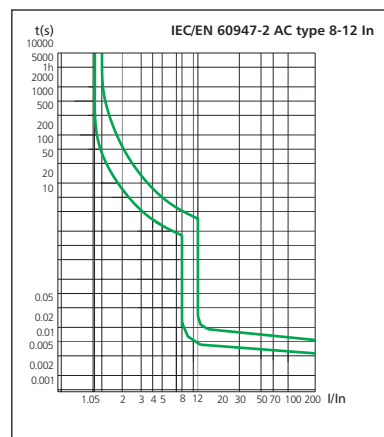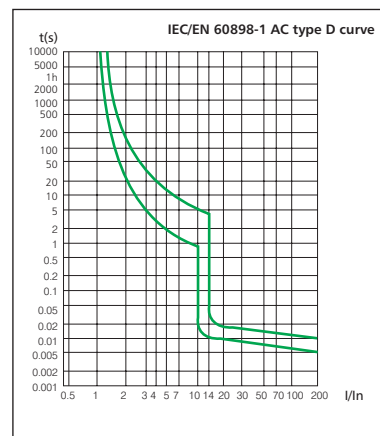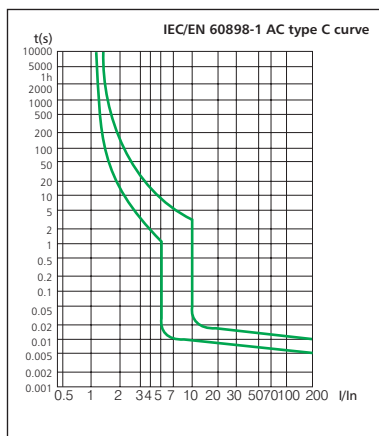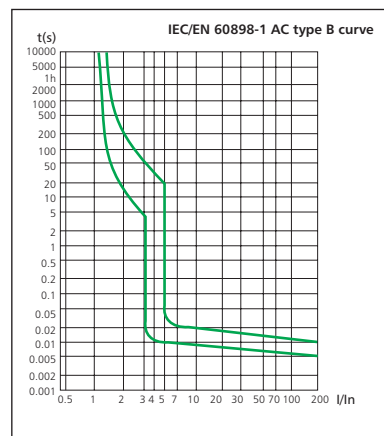

2.2

	Standard		IEC/EN 60898-1	IEC/EN 60947-2	UL1077	
Electrical features	Rated current In	A	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63		1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63	
	Poles		1P, 1P+N, 2P, 3P, 3P+N, 4P	1P, 2P, 3P, 4P	1P, 2P, 3P, 4P	1P, 2P
	Rated voltage Ue	V	230/400~240/415		277/480	110/125
	Insulation voltage Ui	V	500			
	Rated frequency		50/60Hz			DC
	Rated breaking capacity	A	6000/10000	6000	5000	10000
	Energy limiting class		3			
	Rated impulse withstand voltage(1.2/50) Uimp	V	4000			
	Dielectric test voltage at ind. Freq. for 1 min	kV	2	1.890	2	
	Pollution degree		2			
	Power loss per pole		Rated current (A)		Max power loss per pole (W)	
			1, 2, 3, 4, 6, 10		2	
			16, 20, 25, 32		3.5	
			40, 50, 63		5	
	Thermo-magnetic release characteristic		B, C, D	(8-12)In	B, C, D	(4-7)In, (7-15)In
Mechanical features	Electrical life		4, 000			
	Mechanical life		20, 000			
	Contact position indicator		Yes			
	Protection degree		IP20			
	Reference temperature for setting of thermal element	°C	30			
	Ambient temperature (with daily average ≤35°C)	°C	-5...+40			
	Storage temperature	°C	-25...+70			
Installation	Terminal connection type		Cable/U-type busbar/Pin-type busbar			
	Terminal size top/bottom for cable	mm ²	25			
		AWG	18-4			
	Terminal size top/bottom for busbar	mm ²	10			
		AWG	18-8			
	Tightening torque	N*m	2.5			
		lbf-in.	22			
Combination with accessories	Mounting		On DIN rail EN 60715 (35mm) by means of fast clip device			
	Connection		From top and bottom			
	Auxiliary contact		Yes			
	Shunt release		Yes			
	Under voltage release		Yes			
	Alarm contact		Yes			

A

2.3 Selectivity

In (A)	Power supply side: RT36-00 (fuse)								
	20	25	36	50	63	80	100	125	160
	Is (kA)								
≤2	1.2	4	>12	>12	>12	>12	>12	>12	>12
3	0.7	1.2	3.8	5.3	6	6	6	6	6
4	0.6	0.9	2.5	3.8	6	6	6	6	6
6	0.5	0.8	1.9	2.5	4.5	5	6	6	6
10		0.7	1.4	2.2	3.2	3.6	6	6	6
16			1.2	1.8	2.6	3	5.6	6	6
20				1.5	2.2	2.5	4.6	6	6
25				1.3	2	2.2	4.1	5.5	6
32					1.7	1.9	3.8	4.5	6
40						1.7	3	4	5
50						1.5	2.6	3.5	4.5
63							2.4	3.3	4.5

Load side: NB1-63,
NB1-63H
Curve B, C

In (A)	Power supply side: NM8-100S/H/R								
	16	20	25	32	40	50	63	80	100
	Is (kA)								
≤10	0.19	0.19	0.3	0.4	0.5	0.5	0.5	0.63	0.8
16			0.3	0.4	0.5	0.5	0.5	0.63	0.8
20					0.5	0.5	0.5	0.63	0.8
25						0.5	0.5	0.63	0.8
32							0.5	0.63	0.8
40								0.63	0.8
50									0.8
63									

Load side: NB1-63,
NB1-63H
Curve B, C

2.4 Backup protection

In (A)	Power supply side: RT16 series						
	40	50	63	80	100	125	160
	Is (kA)						
1~6	40	40	40	40	40	40	40
8~10	40	40	40	40	40	40	40
13	40	40	40	40	35	35	35
16	40	40	40	40	30	30	30
20	40	40	40	40	30	30	30
25	40	40	40	40	30	30	30
32	40	40	40	40	30	30	30
40	40	40	40	40	30	30	30
50	30	30	30	30	30	30	30
63	20	20	20	20	15	15	15

Load side: NB1-63,
NB1-63H
Curve B, C

In (A)	Power supply side: NM8					
	NM8-125S	NM8-125H	NM8-125R	NM8-250S	NM8-250H	NM8-250R
	Is (kA)					
1~6	15	18	18	15	15	15
10~20	12	15	15	12	12	12
32~40	12	15	15	12	12	12
50~60	12	15	15	12	12	12

Load side: NB1-63,
NB1-63H
Curve B, C

2.5 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.
The reference temperature is 30°C

Ambient temperature Rated current(A) ↘	-35°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.30	1.26	1.23	1.19	1.15	1.11	1.05	1.00	0.96	0.93	0.88	0.83
2	2.60	2.52	2.46	2.38	2.28	2.20	2.08	2.00	1.92	1.86	1.76	1.66
3	3.90	3.78	3.69	3.57	3.42	3.30	3.12	3.00	2.88	2.79	2.64	2.49
4	5.20	5.04	4.92	4.76	4.56	4.40	4.16	4.00	3.84	3.76	3.52	3.32
6	7.80	7.56	7.38	7.14	6.84	6.60	6.24	6.00	5.76	5.64	5.28	4.98
10	13.20	12.70	12.50	12.00	11.50	11.10	10.60	10.00	9.60	9.30	8.90	8.40
16	21.12	20.48	20.00	19.20	18.40	17.76	16.96	16.00	15.36	14.88	14.24	13.44
20	26.40	25.60	25.00	24.00	23.00	22.20	21.20	20.00	19.20	18.60	17.80	16.8
25	33.00	32.00	31.25	30.00	28.75	27.75	26.50	25.00	24.00	23.25	22.25	21.00
32	42.56	41.28	40.00	38.72	37.12	35.52	33.92	32.00	30.72	29.76	28.16	26.88
40	53.20	51.20	50.00	48.00	46.40	44.80	42.40	40.00	38.40	37.20	35.60	33.6
50	67.00	65.50	63.00	60.50	58.00	56.00	53.00	50.00	48.00	46.50	44.00	41.50
63	83.79	81.90	80.01	76.86	73.71	70.56	66.78	63.00	60.48	58.90	55.44	52.29

When several simultaneously operating circuit breakers are mounted side by side in a small enclosure, the temperature rise inside the enclosure causes a reduction in current rating.
You must then assign the rating (already derated if necessary according to ambient temperature) a downrating factor of 0.8.

3. Overall and mounting dimensions (mm)

